
Slitter S E R I E S


The Stamp of Juxury

_3⁰0x600mm



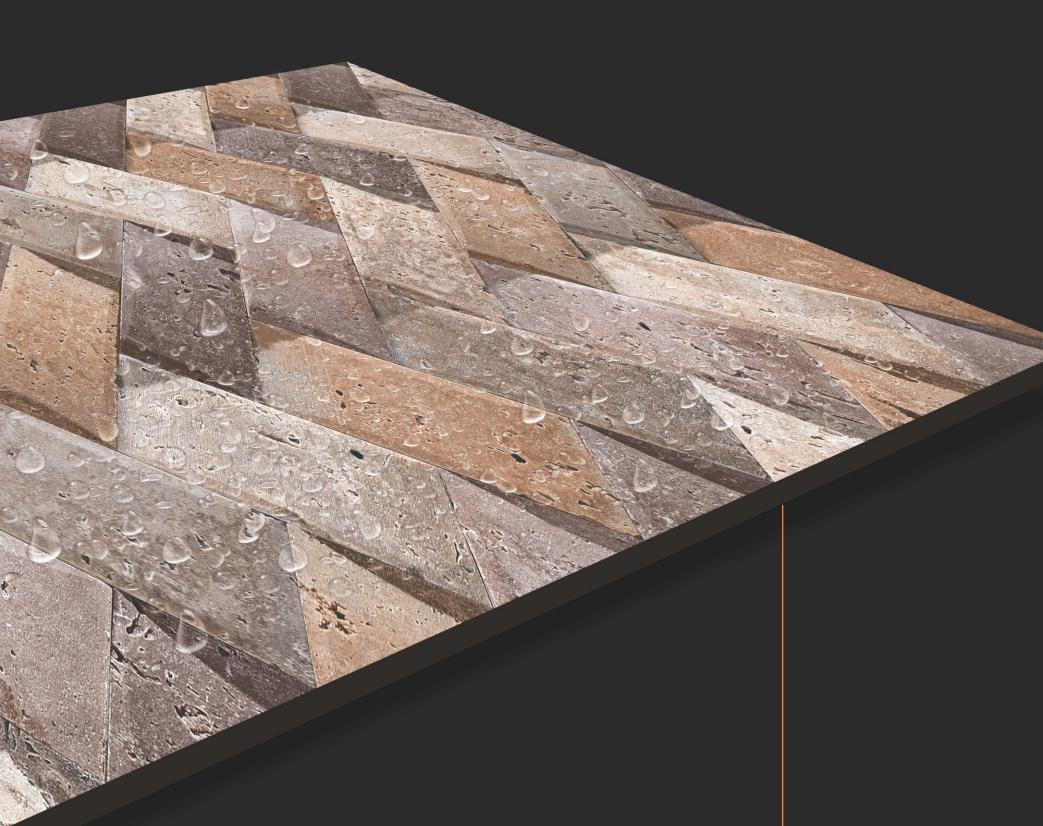

_300x600mm

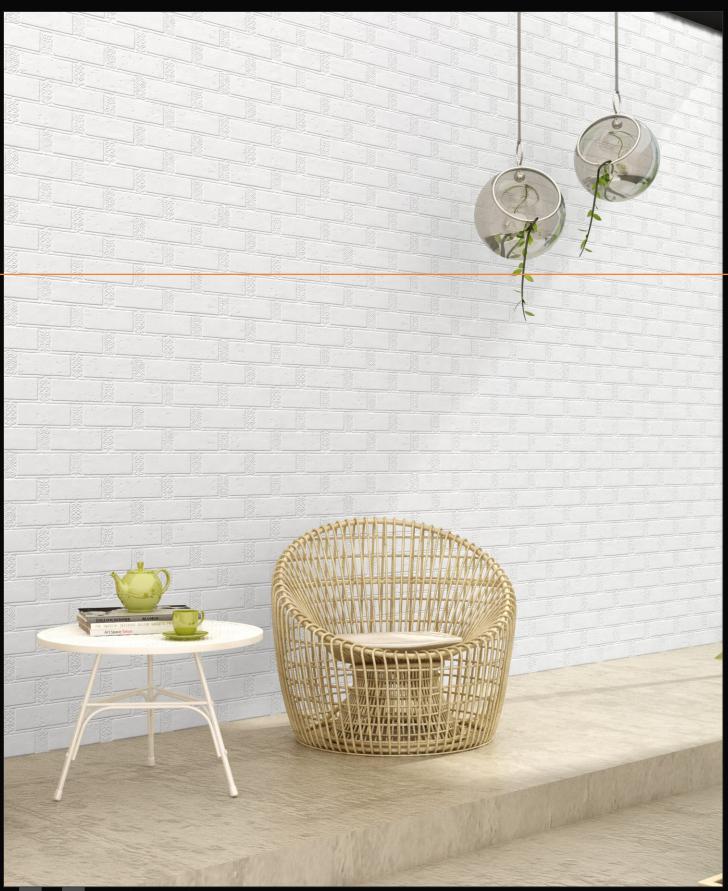

glitter

a town known as the Paris of India given it is the largest production of tiles in the country. Accompanied by ISO 9001 certified methods of production, we offer superior quality tiles which are duly tested as per International standards.


We have Digital Printing Machines which are a new generation of German printing Technology. The printing quality of these machines is of high definition so we get better clarity of design. We are equipped with higher-end Italian machinery as well as technical excellence and expertise, which are reflected in well-designed quality tiles that make our identity. We have in house R & D department, where continuous research is done in design and quality of tiles in order to provide value for money for our customers.

With multiple series like calico, extent, tissot, crystal,omega, rustico,delfos,mozart to make your home beautiful and captivating instantly, we are pleased to inform you that we have a production capacity of 7000 boxes per day, to provide effective and timely delivery to our valued customers.

DIFFERENT SHADES OF COLOR LOOK JUST SO REALISTIC AND BEAUTIFUL.




HIGH DEPTH ELEVATION WALL TILES





GIVE EVERY SPACE THE POWER OF EXPRESSION

inspired by the Irregularity of typical features of everyday life: the shadows of lines cast by the sun on a wall, a hedge made with the leaves of a plant, the vines that cover a wall, spacial soil that is created when rock is exposed to wind and rain, the appearance of gradually worn material etc. The reconstructed these situations and expressions of everyday life, using straight lines, on tiles designed exclusively for harmony.

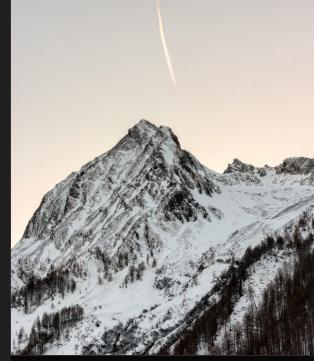



TECHNICAL CHARACTERISTICS



ZERO MAINTENANCE



12 COLOR TECHNOLOGY



ECO FRIENDLY



RECTIFIED TILES



WALL TILES



HEAT RESISTANT




SCRATCH RESISTANT




HD DIGITAL PRINT







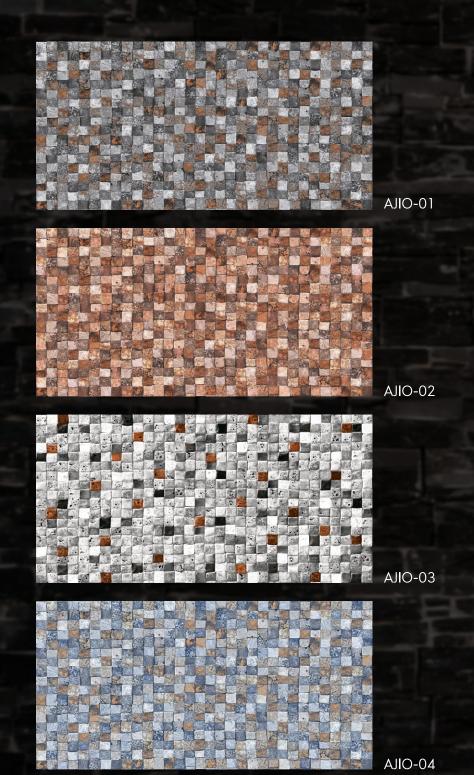

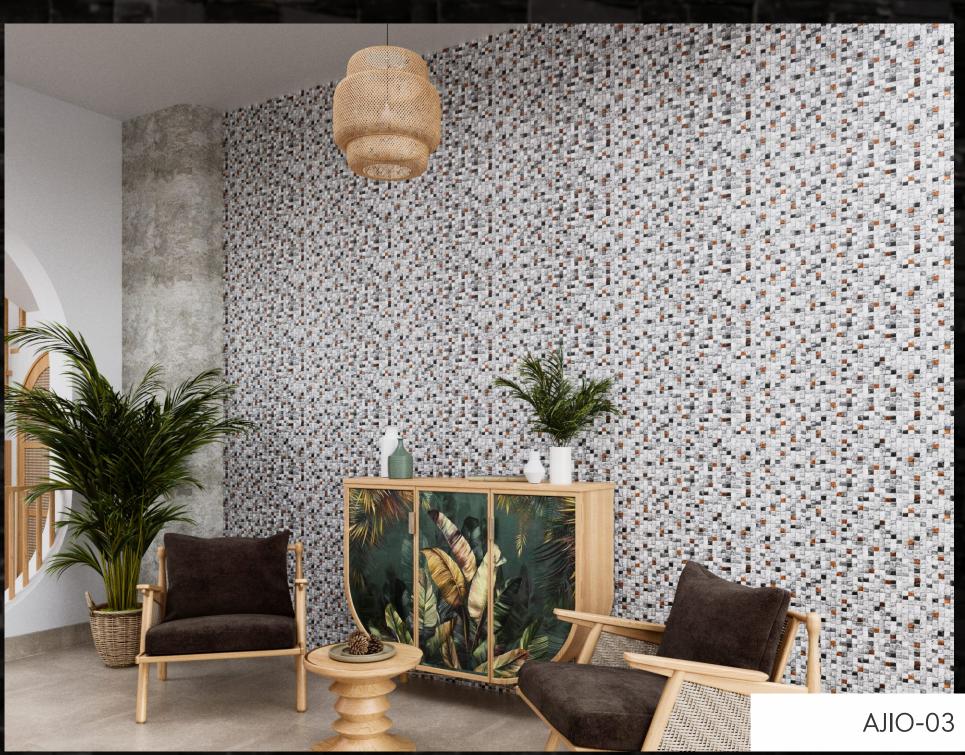




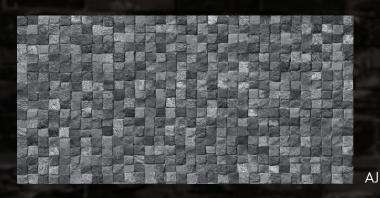


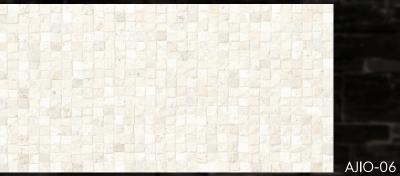



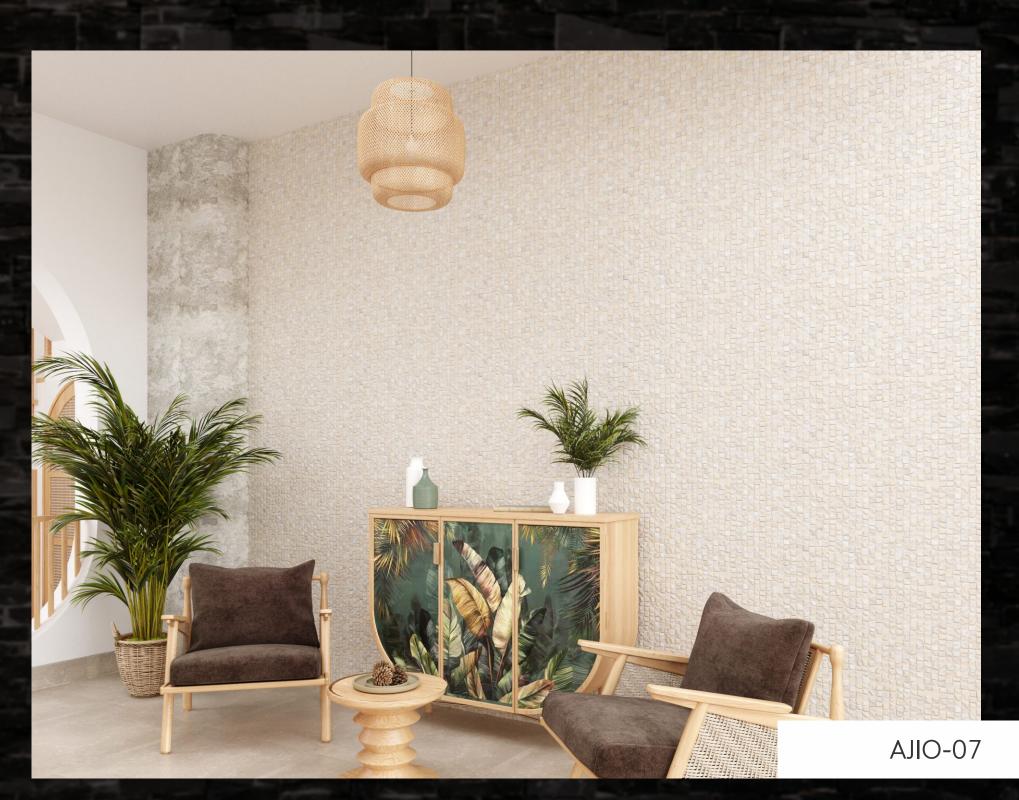









CHINA BRICK-02



CHINA BRICK-03



CHINA BRICK-04












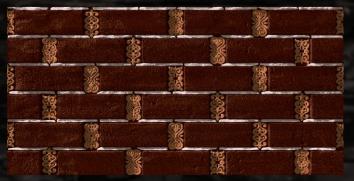

CHINA BRICK-09



CHINA BRICK-10




CHINA BRICK-12



CHINA BRICK-13






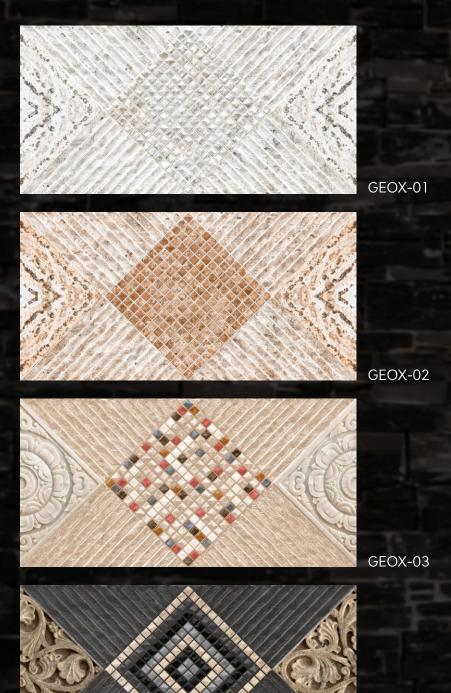


GEOX-04






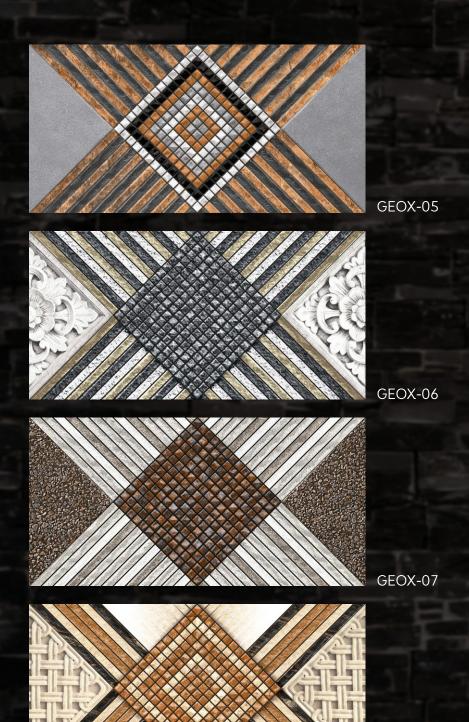

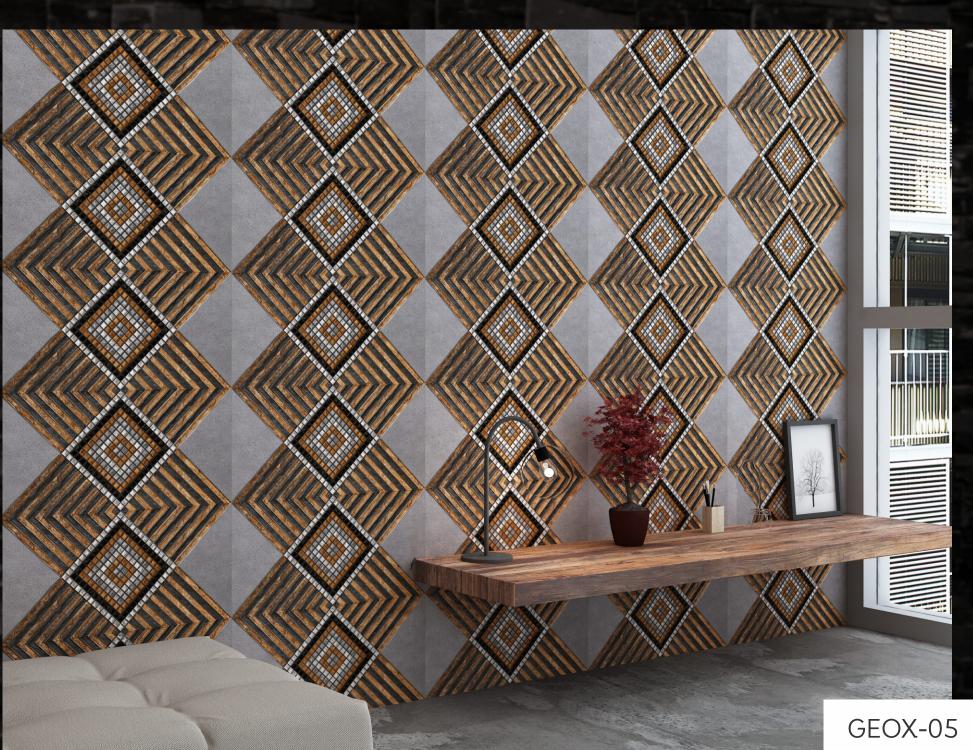






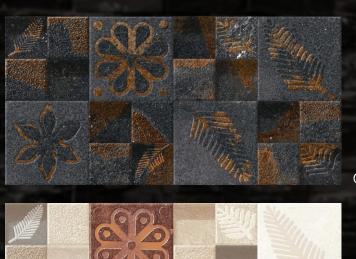







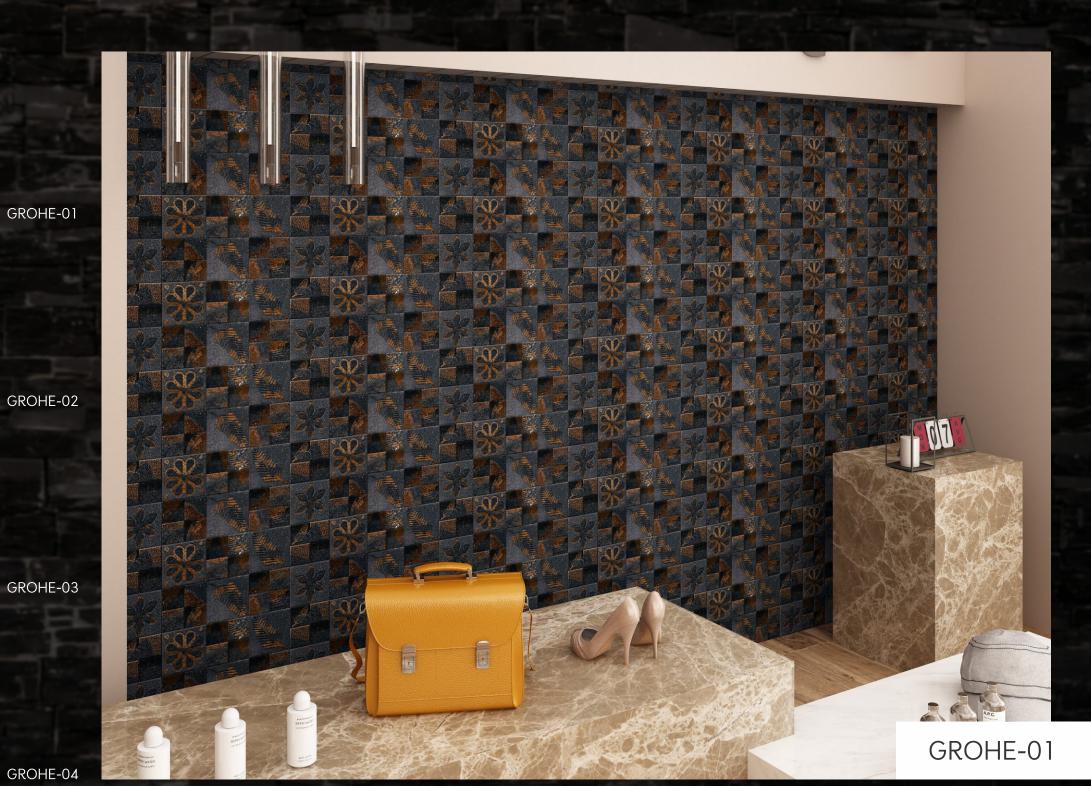





GROHE-05




GROHE-06



GROHE-07



GROHE-08

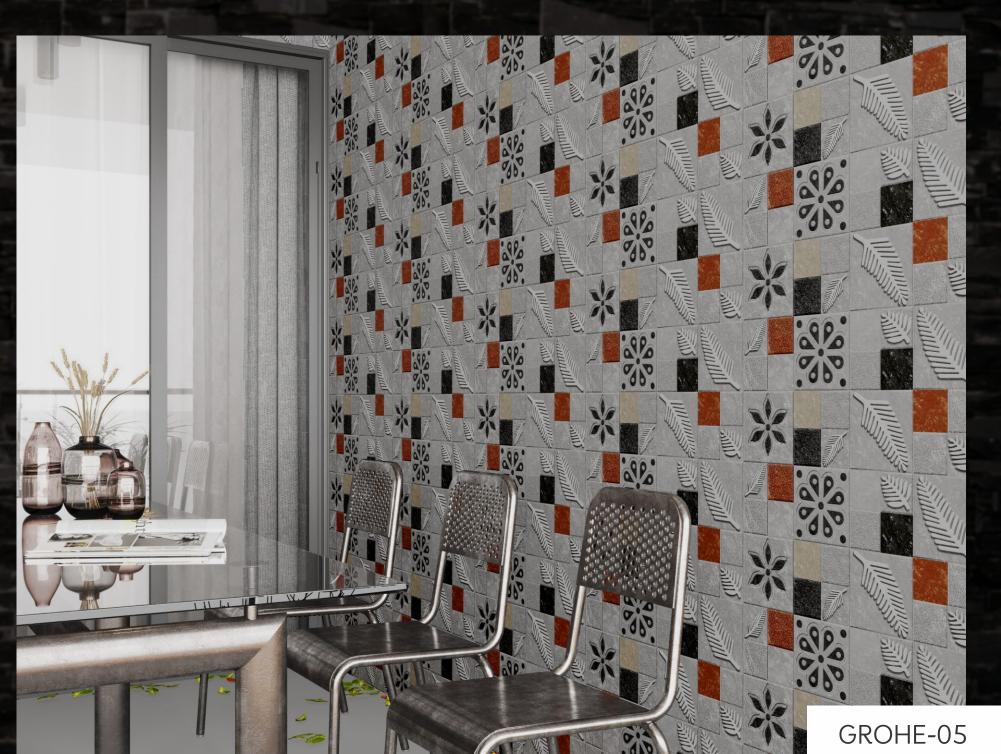





GROHE- 09



GROHE-13




GROHE-10



GROHE-11




GROHE-12

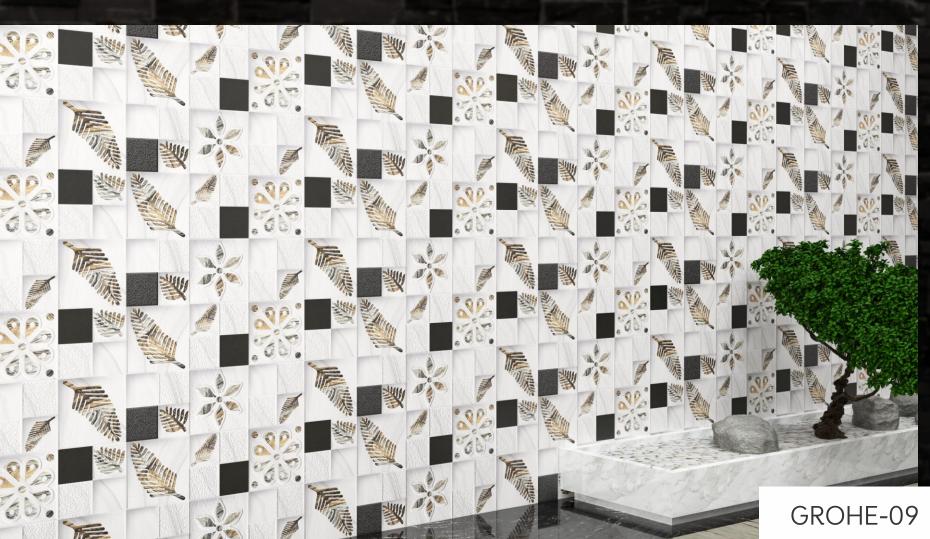






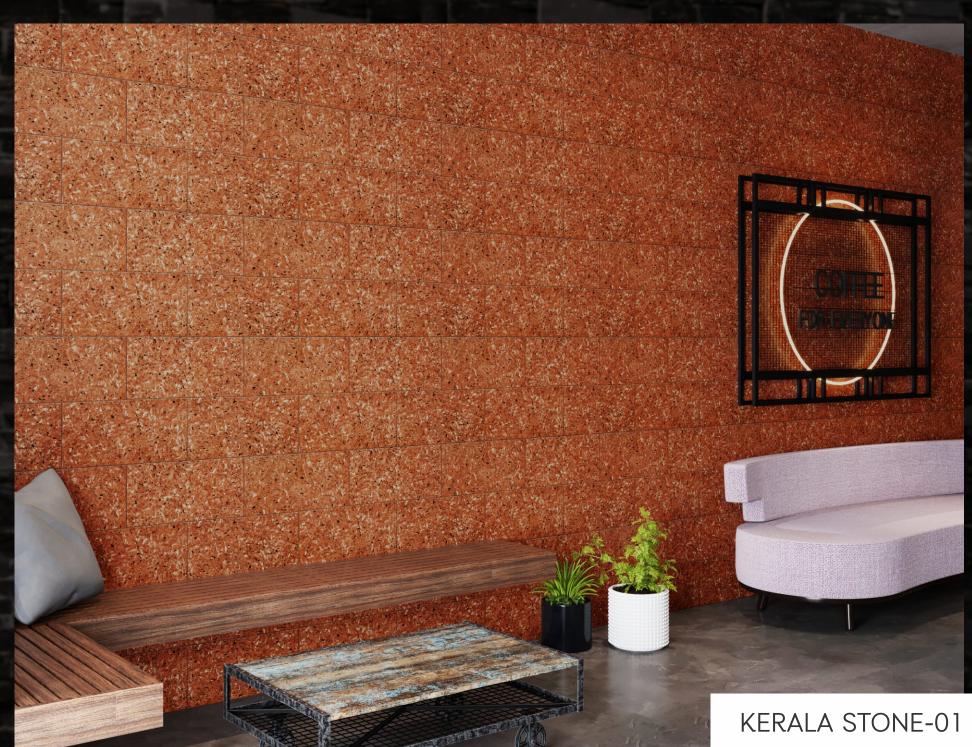





KERALA STONE-05

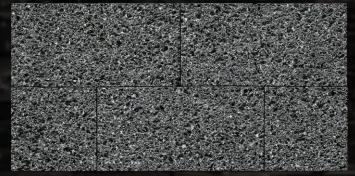

KERALA STONE-06



KERALA STONE-06



















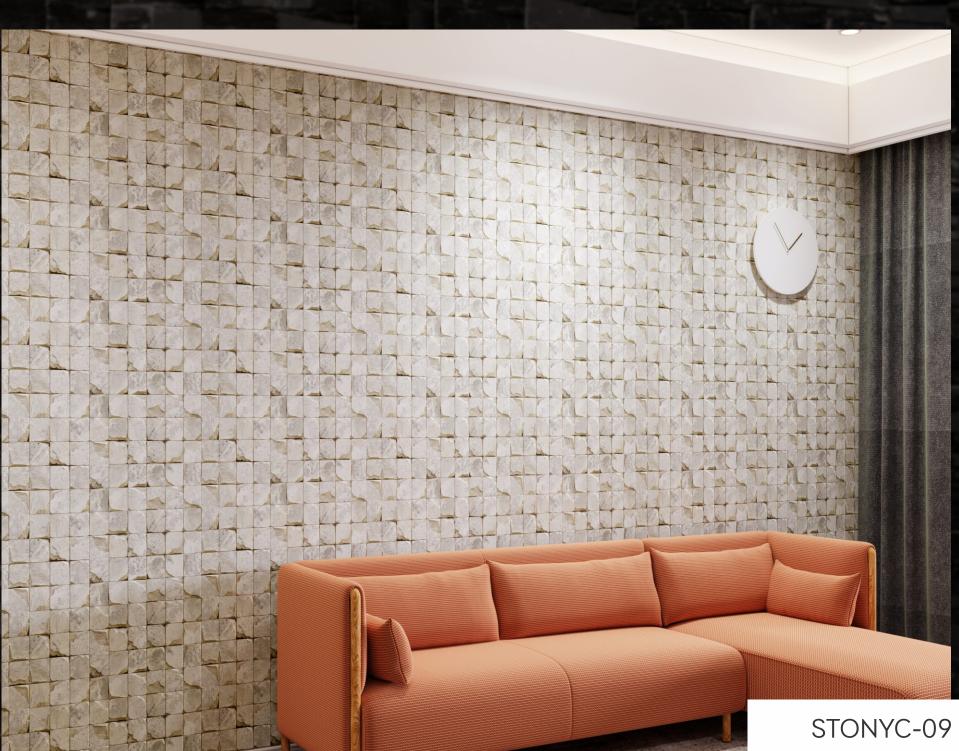




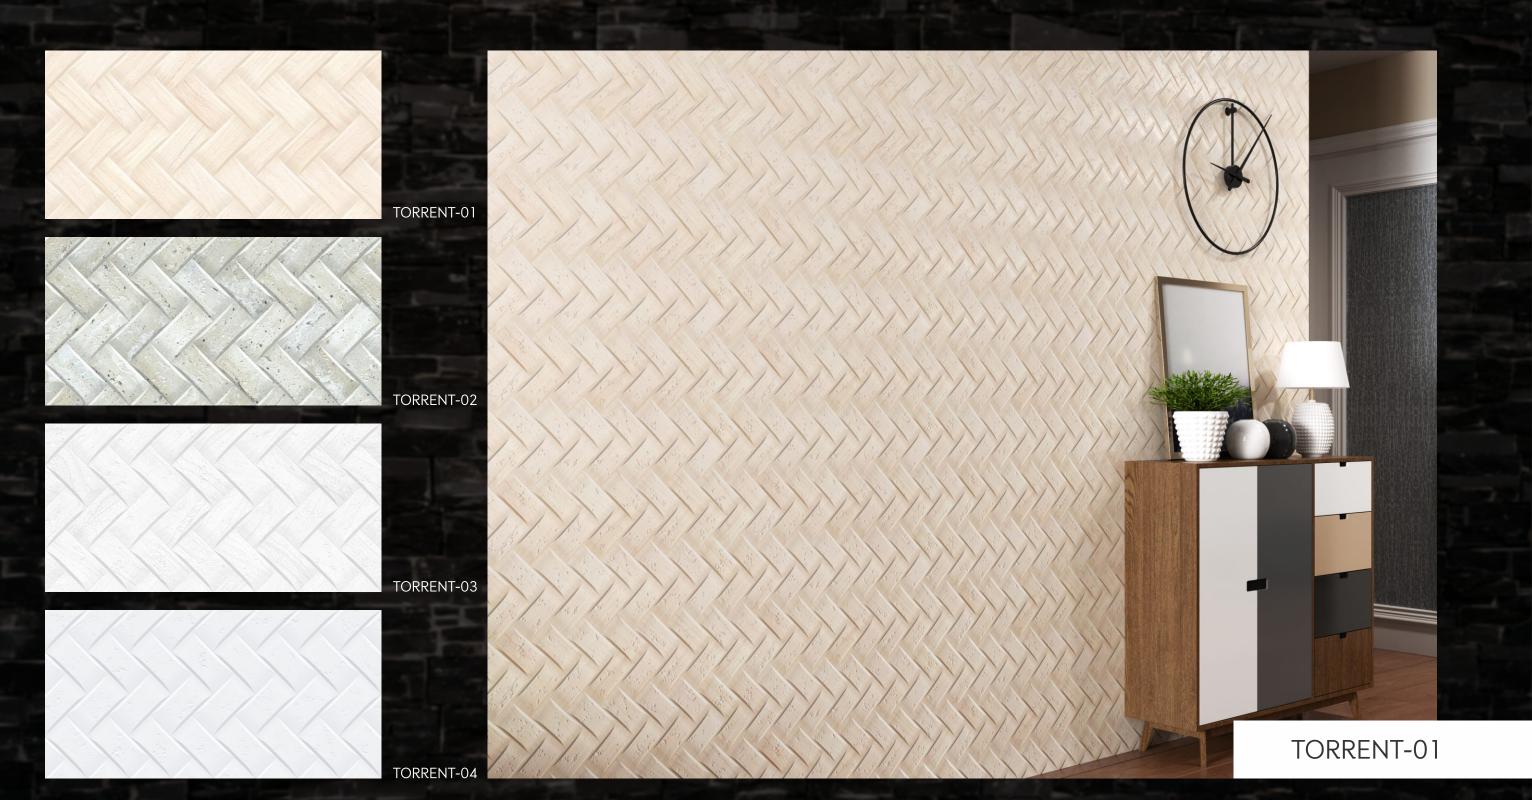








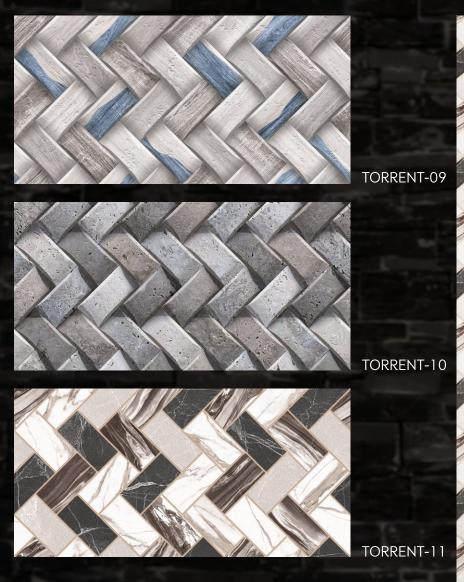

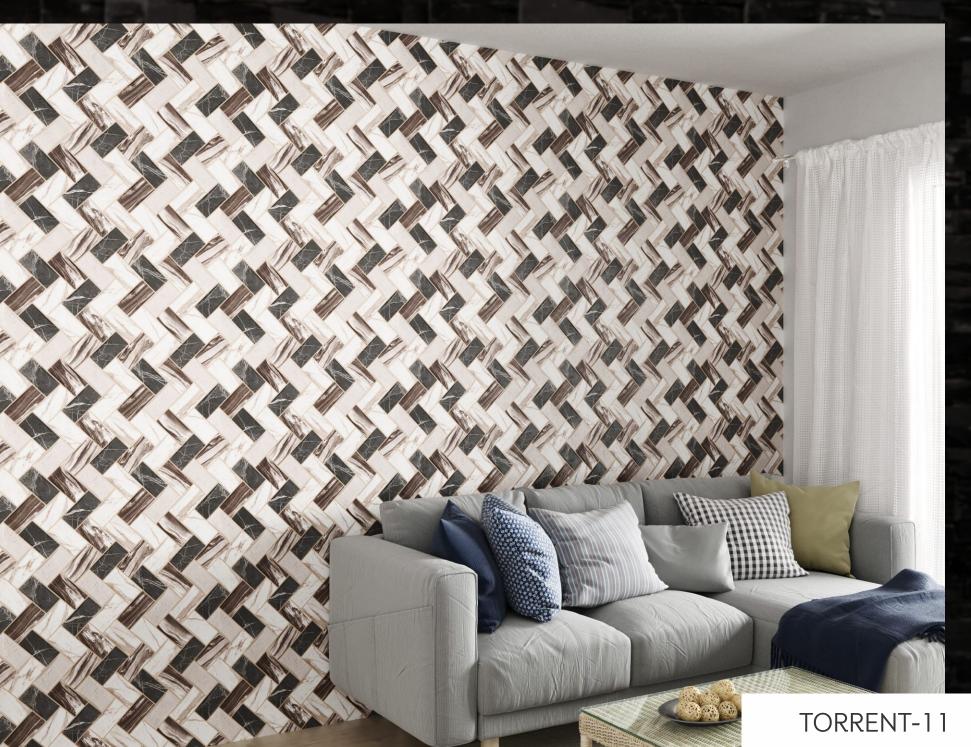





TREE-01




TREE-02



TREE-03



TREE-04

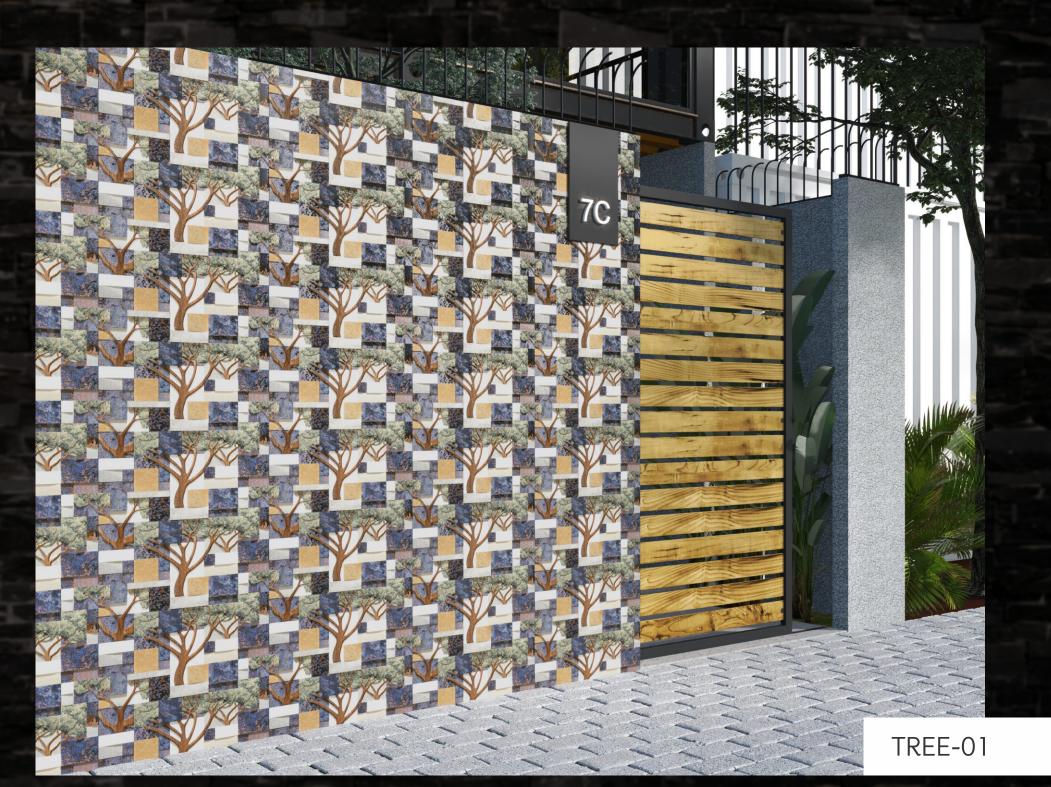





TREE-05



TREE-06



TREE-07



TREE-08








TREE-09



TREE-10



TREE-11

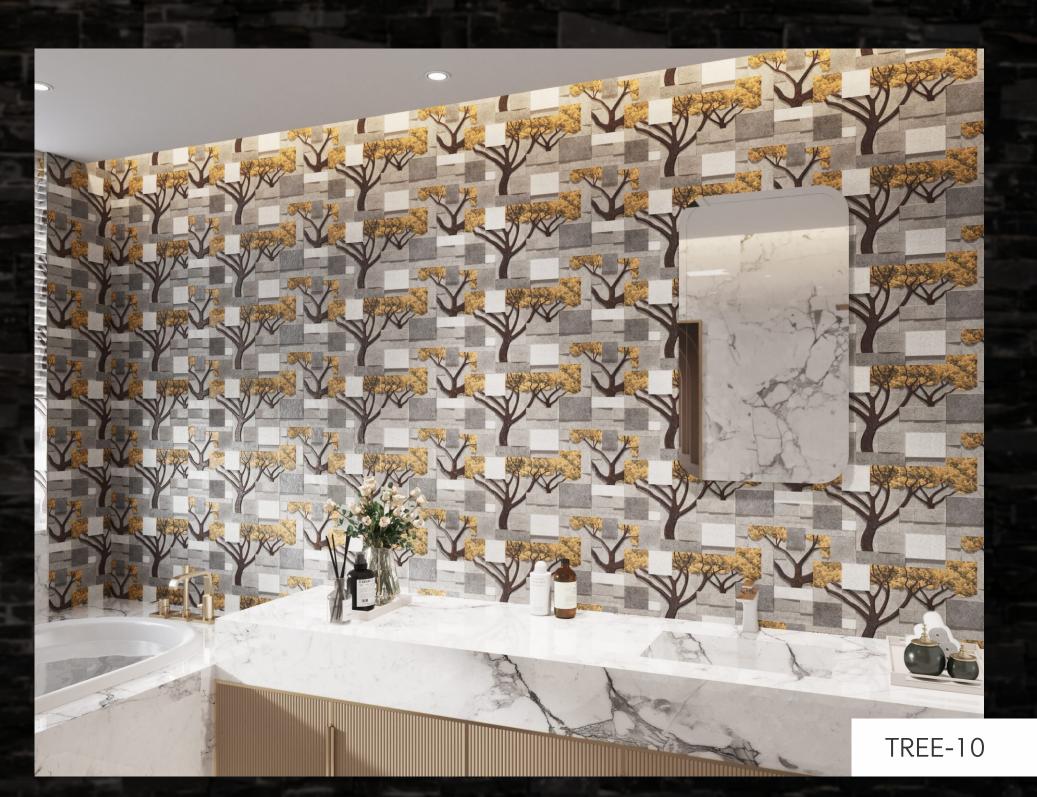






ZARA-01



ZARA-02




ZARA-03

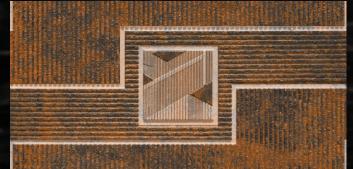


ZARA-04






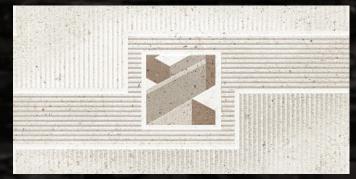

ZARA-05

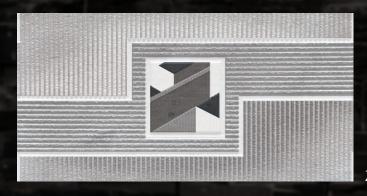

ZARA-06

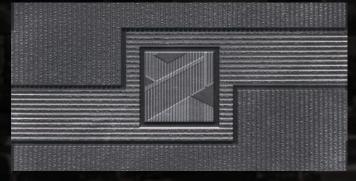


ZARA-07



ZARA-08





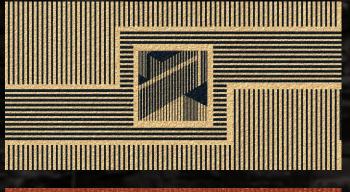






ZARA-10







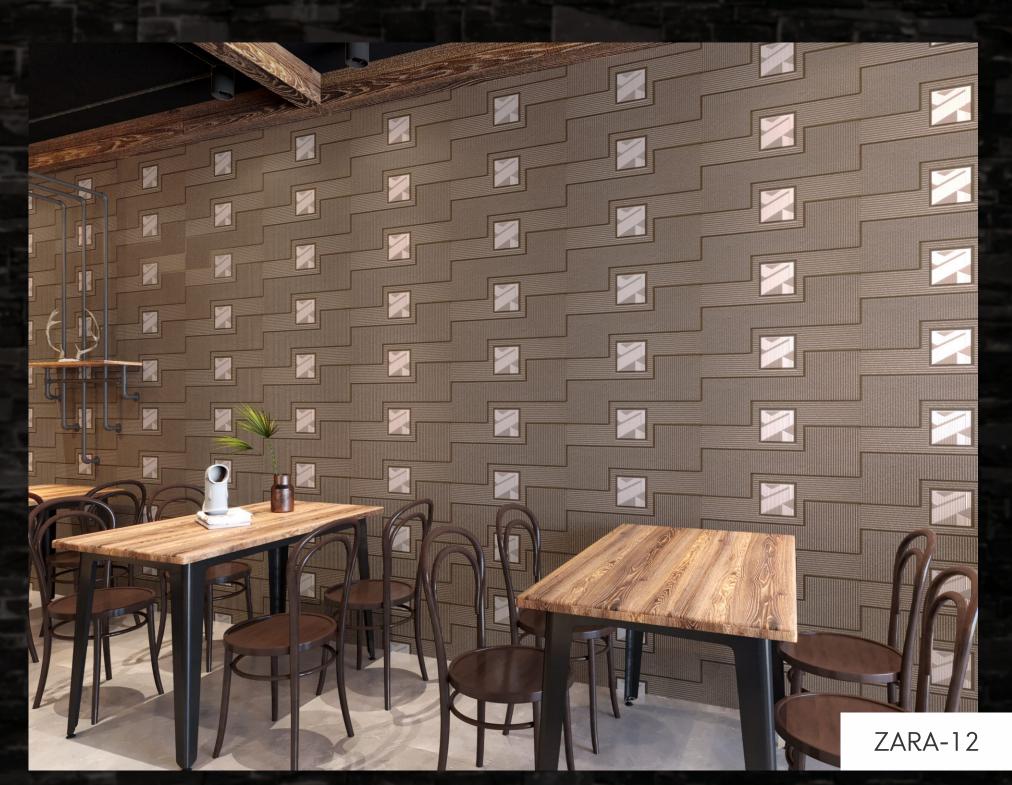


















ZIVAMA-09



ZIVAMA-10



TECHNICAL FEATURES OF WALL TILES

Characteristics	Euro Standards EN - 159 / IS 13753	Our Value			
Dimension & Surface quality					
Dimension	±0.5%	±0.2%			
Deviation in thickness	±0.6 mm	±0.2 mm			
Straightness of sides	±0.3%	±0.2%			
Rectangularity	±0.5%	±0.3%			
Surface flatness	±0.5%	±0.3%			
Surface quality	Min. 95%	Min. 95%			
Physical properties					
Water absorption	> 10%	Ave. 10-20%			
Bending strength	> 150 kg/cm²	150 kg/cm ²			
Scratch hardness (mohs)	Min. 3	Min. 3			
Crazing	1 Cycle	No Crazing at 4 Cycles			
Chemical properties					
Staining resistance	Min. Class 2	Resistance to all Acids			
Household chemical	Min. Class B	And Alkalies & Household			
		Chemicals, except			
		Hydro Flouric Acid			
Thermal properties					
Thermal shock	Resistant to 10 Cycles	CONFORMS			
Thermal expansion	Max. 9E ⁻⁰⁶ CONFORMS				

PACKAGING DETAILS

Dimensions	Thickness (approx.)	Tiles / Box	Coverage Area / Box	Avg. Weight / Box (approx.)
300x600mm	11-11.5mm	5 pcs.	0.90 sq. mtr.	14.0 kgs.

